



Rick Nooijen

rick.nooijen@wetsus.nl, rick.nooijen@wur.nl

### Motivation

PFAS are a global problem for water quality and safety, considering the persistent risk PFAS pose to human health. Therefore, there is an urgent need for effective PFAS removal.

Granular activated carbon adsorption is the standard method applied in water treatment to remove organic pollutants, but it is inefficient for removing PFAS. Consequently, alternatives like anion-exchange resins and clays are being explored. However, small perfluoroalkyl acids, like PFBA, cause early failure of the adsorbent.[1]

Recently, certain cationic, macrocyclic pillar[5]arenes (P5) (**Figure 1**) have proven to be promising adsorbents that offer a new approach. P5 immobilized on resin beads has unique affinity, selectivity and capacity for the capture of PFOA and PFOS in continuous-flow systems.[2] Some interactions between P5 and PFAS that might play a role are shown in **Figure 2**.

### Technological challenge

The promising results of P5-resin encourage to develop P5-based adsorbents or other methods into a real-world applicable system. Broadening P5 application first requires study of appropriate materials to immobilize P5 onto. The functionalized material must be stable: P5 should not be damaged during use. Thereafter, suitable P5-functionalized materials must be tested on a small scale to elucidate kinetics of the P5-PFAS binding mechanism and robustness against salt and fouling by natural organic matter. Regeneration is important to optimize, because reusability of the adsorbent is paramount for cost-efficiency. Lastly, a P5-based system will have to be scaled up. At this step, it is expected that pre-treatment and operational parameters are the major focus.[3][4]

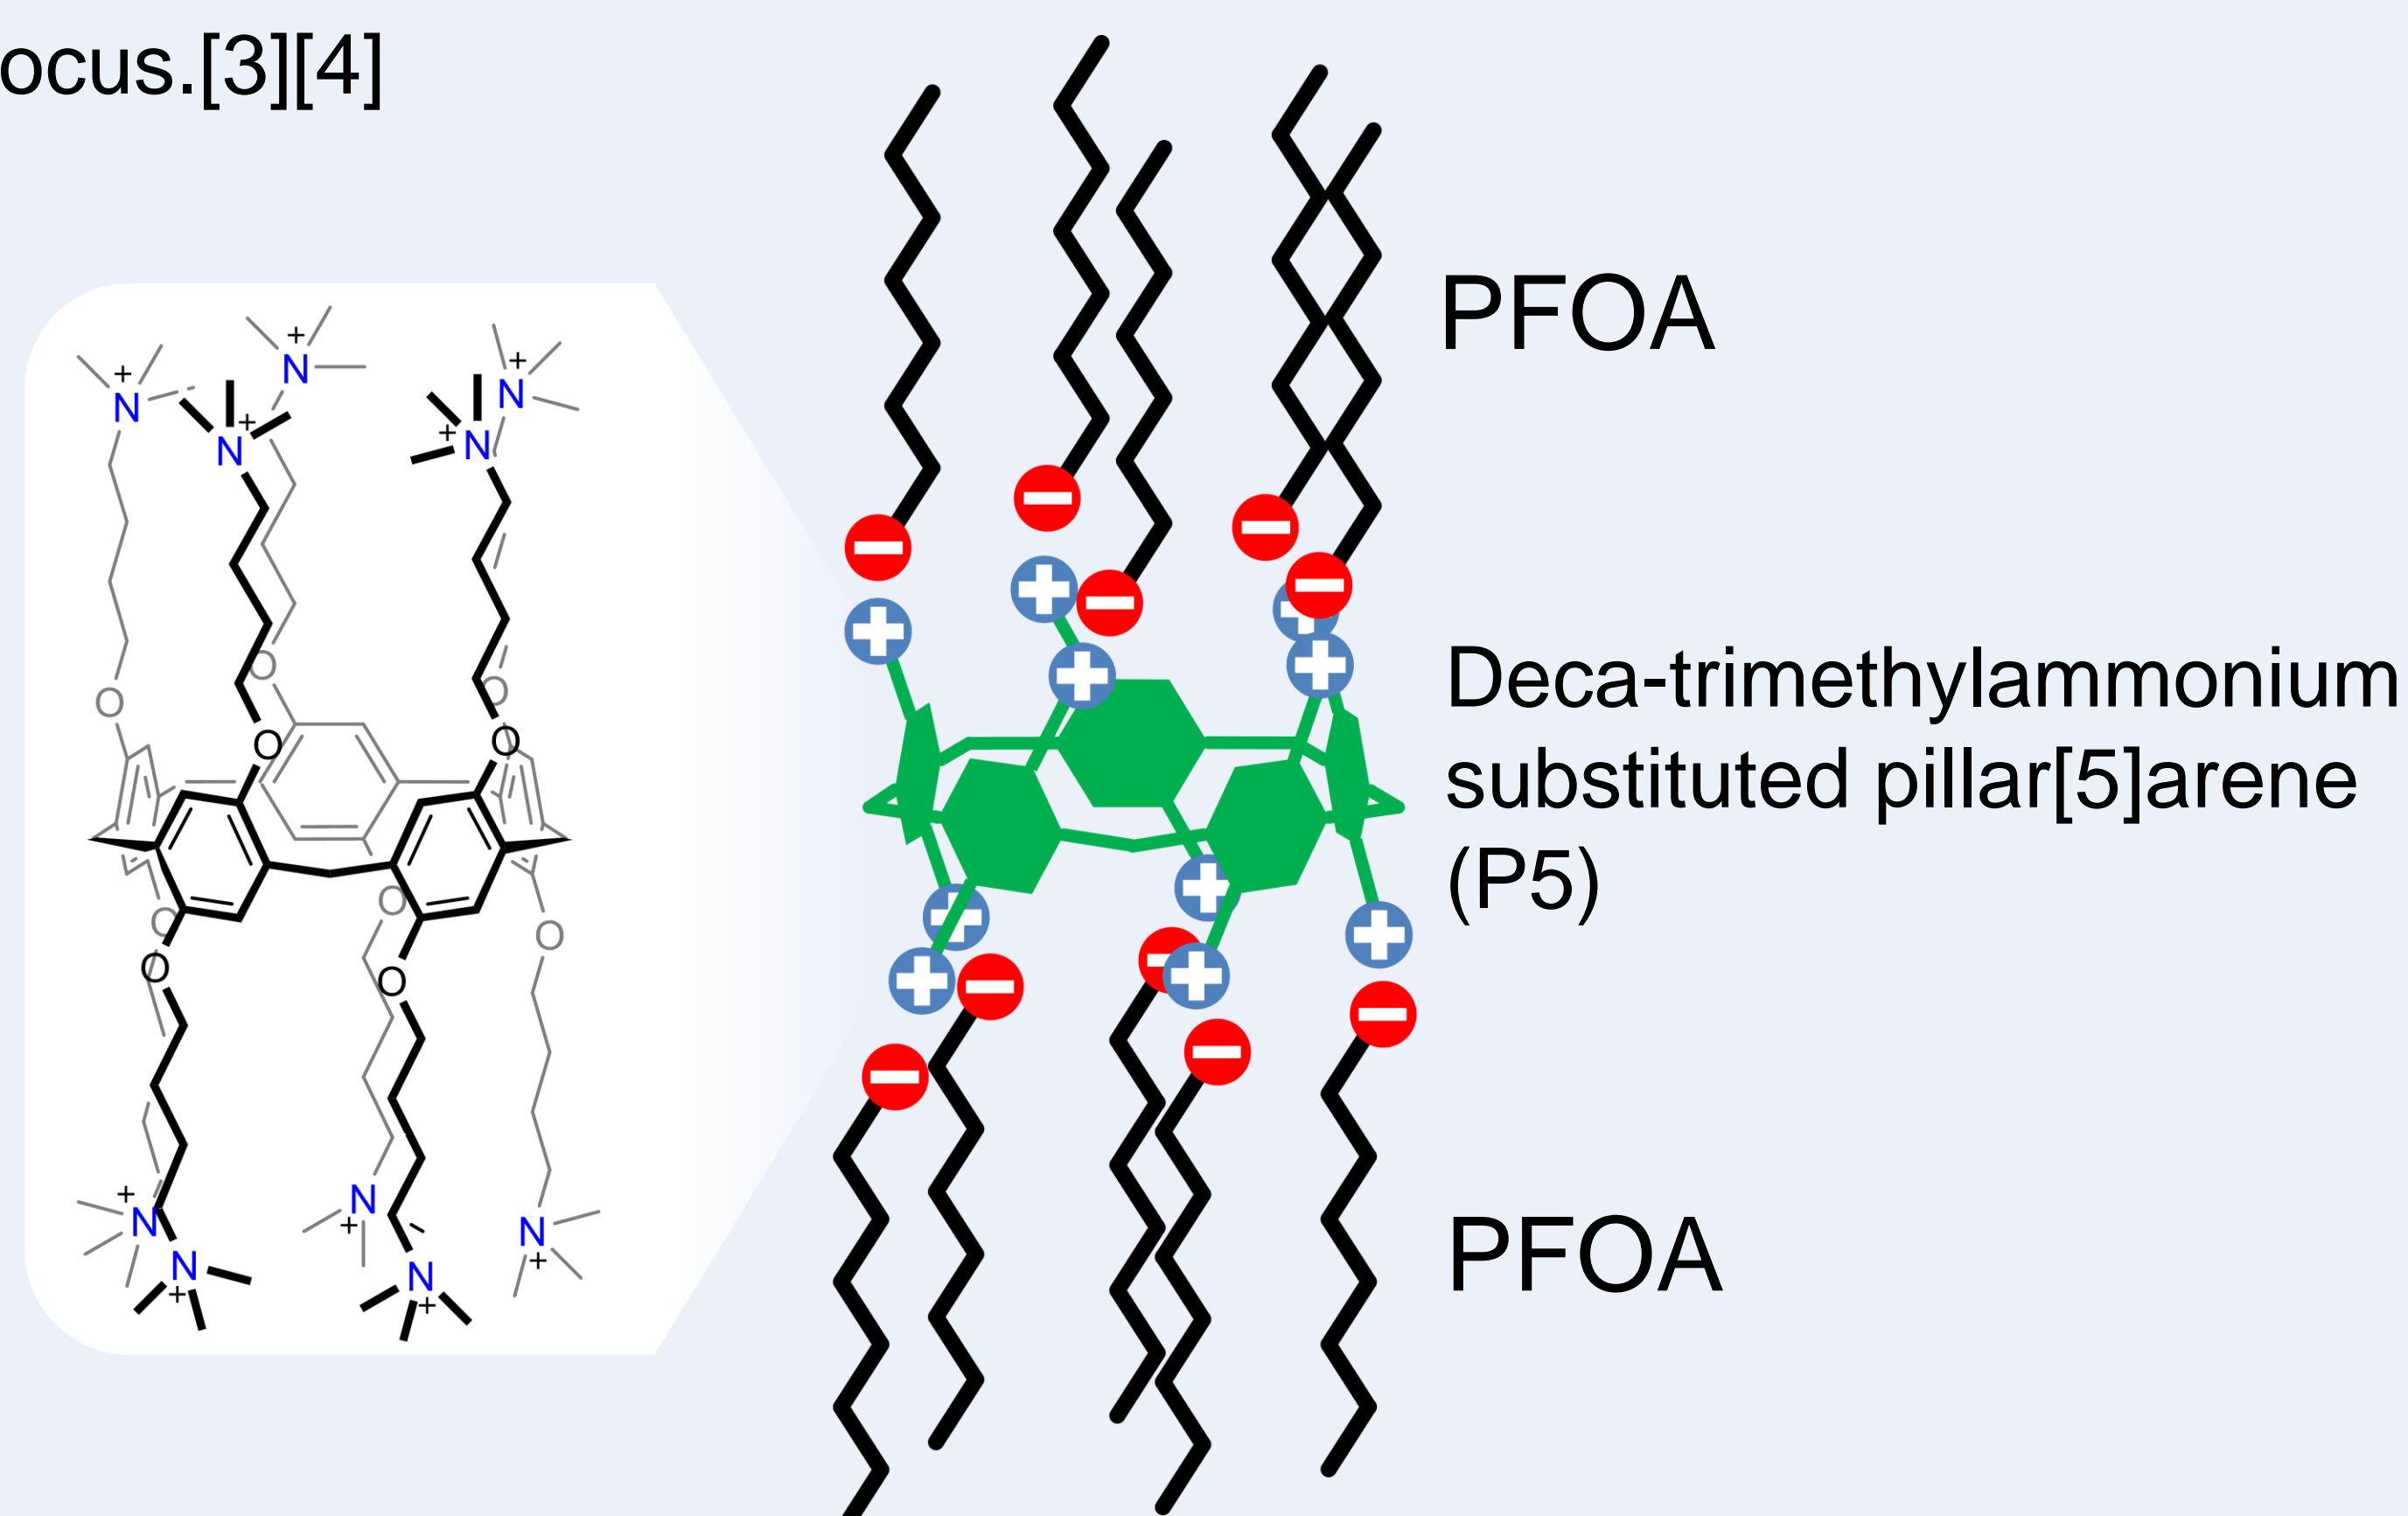


Fig 1. P5 forming a complex with 10 PFOA molecules.

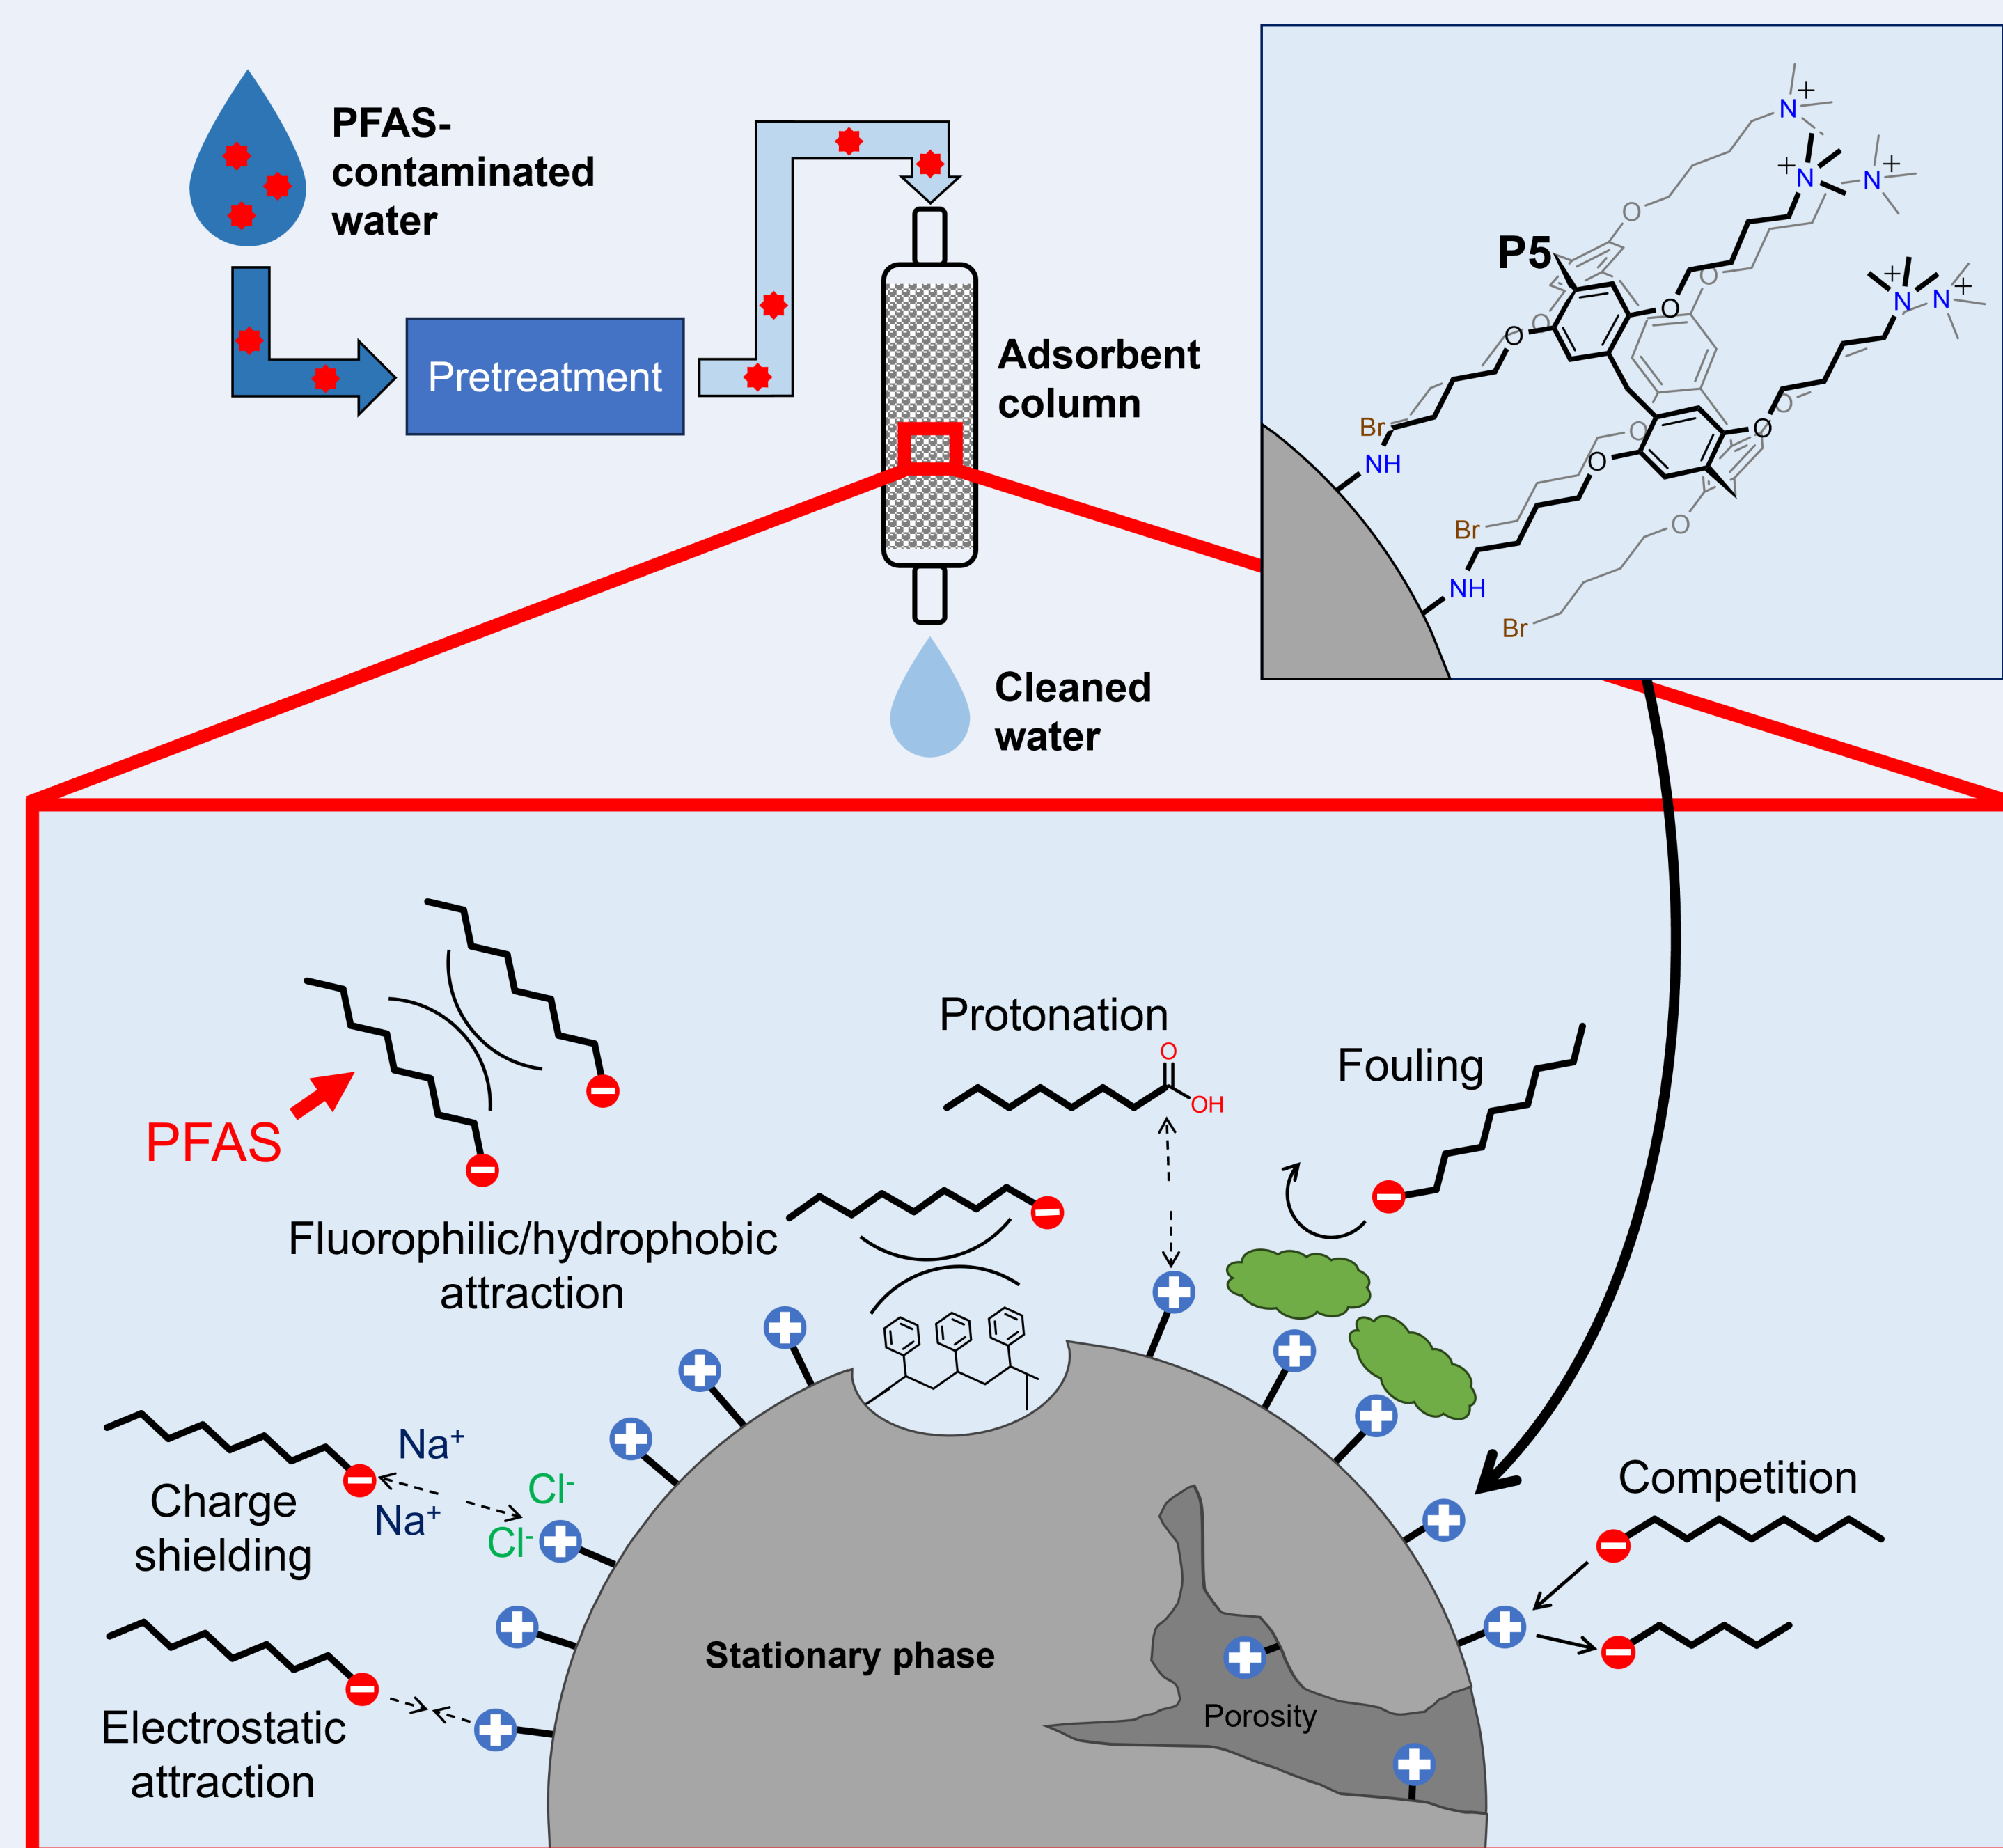


Fig 2. Different kind of interactions and properties that may be at play in a P5-modified resin packed-bed column tested in prior research [2].

### Research goals

This project aims to deepen the understanding of P5-based adsorbents in PFAS removal and enhance their performance through investigation of:

- 1) a range of materials and (adsorption) methods, such as packed-bed resins and other adsorbents, for their compatibility as a base for immobilization of P5 in a flowing system;
- 2) the efficiency of such regenerable P5-based systems for PFAS capture on a small scale;
- 3) the requirements for scaling up the best-performing P5-based system to efficiently reduce PFAS levels in water to acceptable levels.

### References

- [1] Pannu, M. W.; Huang, A.; Plumlee, M. H. *Water Environ Res* **2024**, 96 (5), e11035. DOI: 10.1002/wer.11035 From NLM Medline.
- [2] Gao, T. N.; Huang, S.; Nooijen, R.; Zhu, Y.; Kociok-Köhn, G.; Stuerzer, T.; Li, G.; Bitter, J. H.; Salentijn, G. I. J.; Chen, B.; et al. *Angew Chem Int Ed* **2024**, 63, e202403474. DOI: 10.1002/ANIE.202403474.
- [3] Lin, Z. W.; Shapiro, E. F.; Barajas-Rodriguez, F. J.; Gaisin, A.; Ateia, M.; Currie, J.; Helbling, D. E.; Gwinn, R.; Packman, A. I.; Dichtel, W. R. *Environ Sci Technol* **2023**, 57 (48), 19624-19636. DOI: 10.1021/acs.est.3c04233 From NLM Medline.
- [4] Spit, T.; Goense, J.; Wevers, J. STOWA, 2023.